



Qualcomm



3GPP RELEASE 20

Completing the 5G Advanced evolution and
preparing for the next-generation wireless

@QCOMResearch | June 2025

The need for continued wireless evolution



Mobile data consumption continues to grow

Global mobile data usage predicted to grow **4x** by 2030

Key drivers fueling mobile traffic increase:



Broad
5G use



Enhancements in
streaming video quality



The rise
of XR



Cloud
gaming



AI is bringing new data traffic for mobile

AI poised to transform global wide-area network (WAN) traffic with consumer AI traffic dominating

Global WAN traffic projected to grow **5x** to **9x** from 2023 to 2033, with AI accounting for **33%** of all traffic





Services available globally

354+

Operators in 133 countries/territories deployed 5G services

169+

Operators in 74 countries/territories deployed 5G FWA

163+

Operators investing in 5G Standalone (SA), with 73 operator launches

26+

Operators in 15 countries/territories investing in 5G Advanced

633+

Operators in 188 countries/territories investing in 5G

3.2B

5G smartphones shipped globally



Driving 5G forward

**5G Non-
Standalone**

**5G
Standalone**

**5G
Advanced**

Faster 4G→5G
transition

Superior
performance

5G smartphones

Fixed wireless
access

Network slicing

Extreme capacity
(NR-DC)

Lower complexity
devices & networks

Ultra-low latency

New services &
business models

5G coverage

AI/ML for devices
& networks

R18+ performance
enhancements

Satellite
communications

5G RedCap

Segment
enhancements –
XR, drones

Higher order
modulation


Qualcomm
X85 5G Modem-RF

AI-powered
5G Advanced
across device
segments

12.5+ Gbps

Download peak speed

Driving the ecosystem
for global 5G Advanced
commercialization

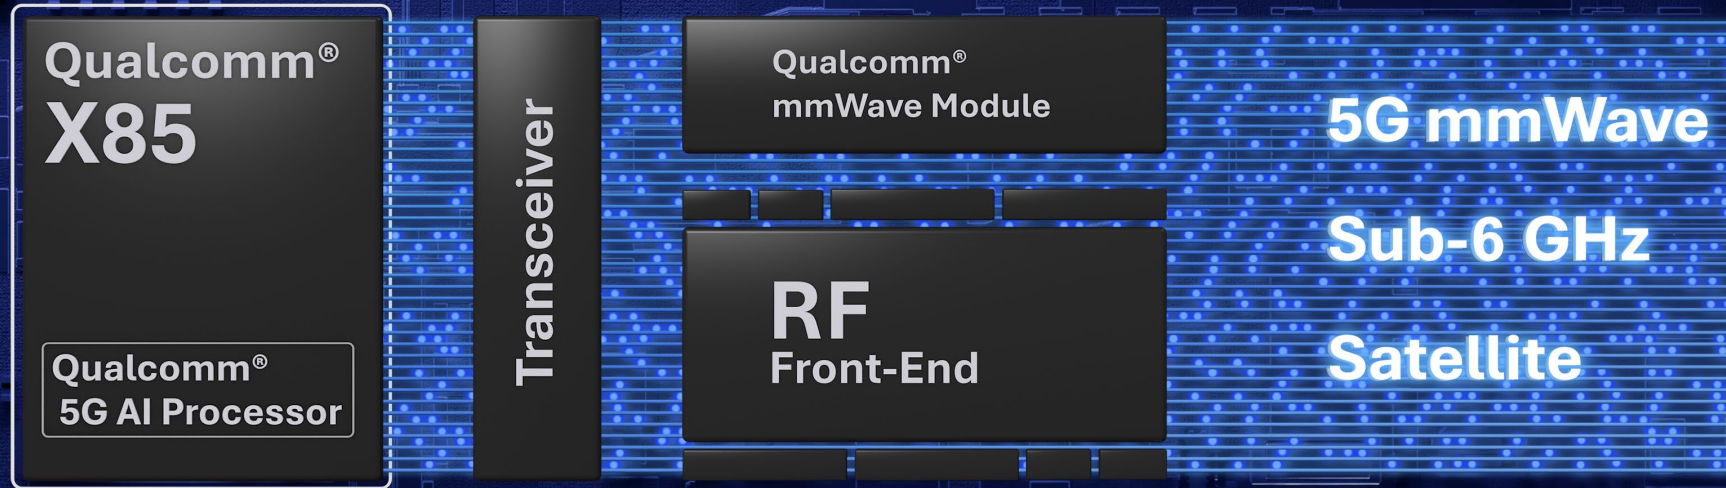

Smartphones



Fixed Wireless
Access



Mobile
Broadband




PCs




Industrial IoT

On the path to 6G... from 5G and 5G Advanced

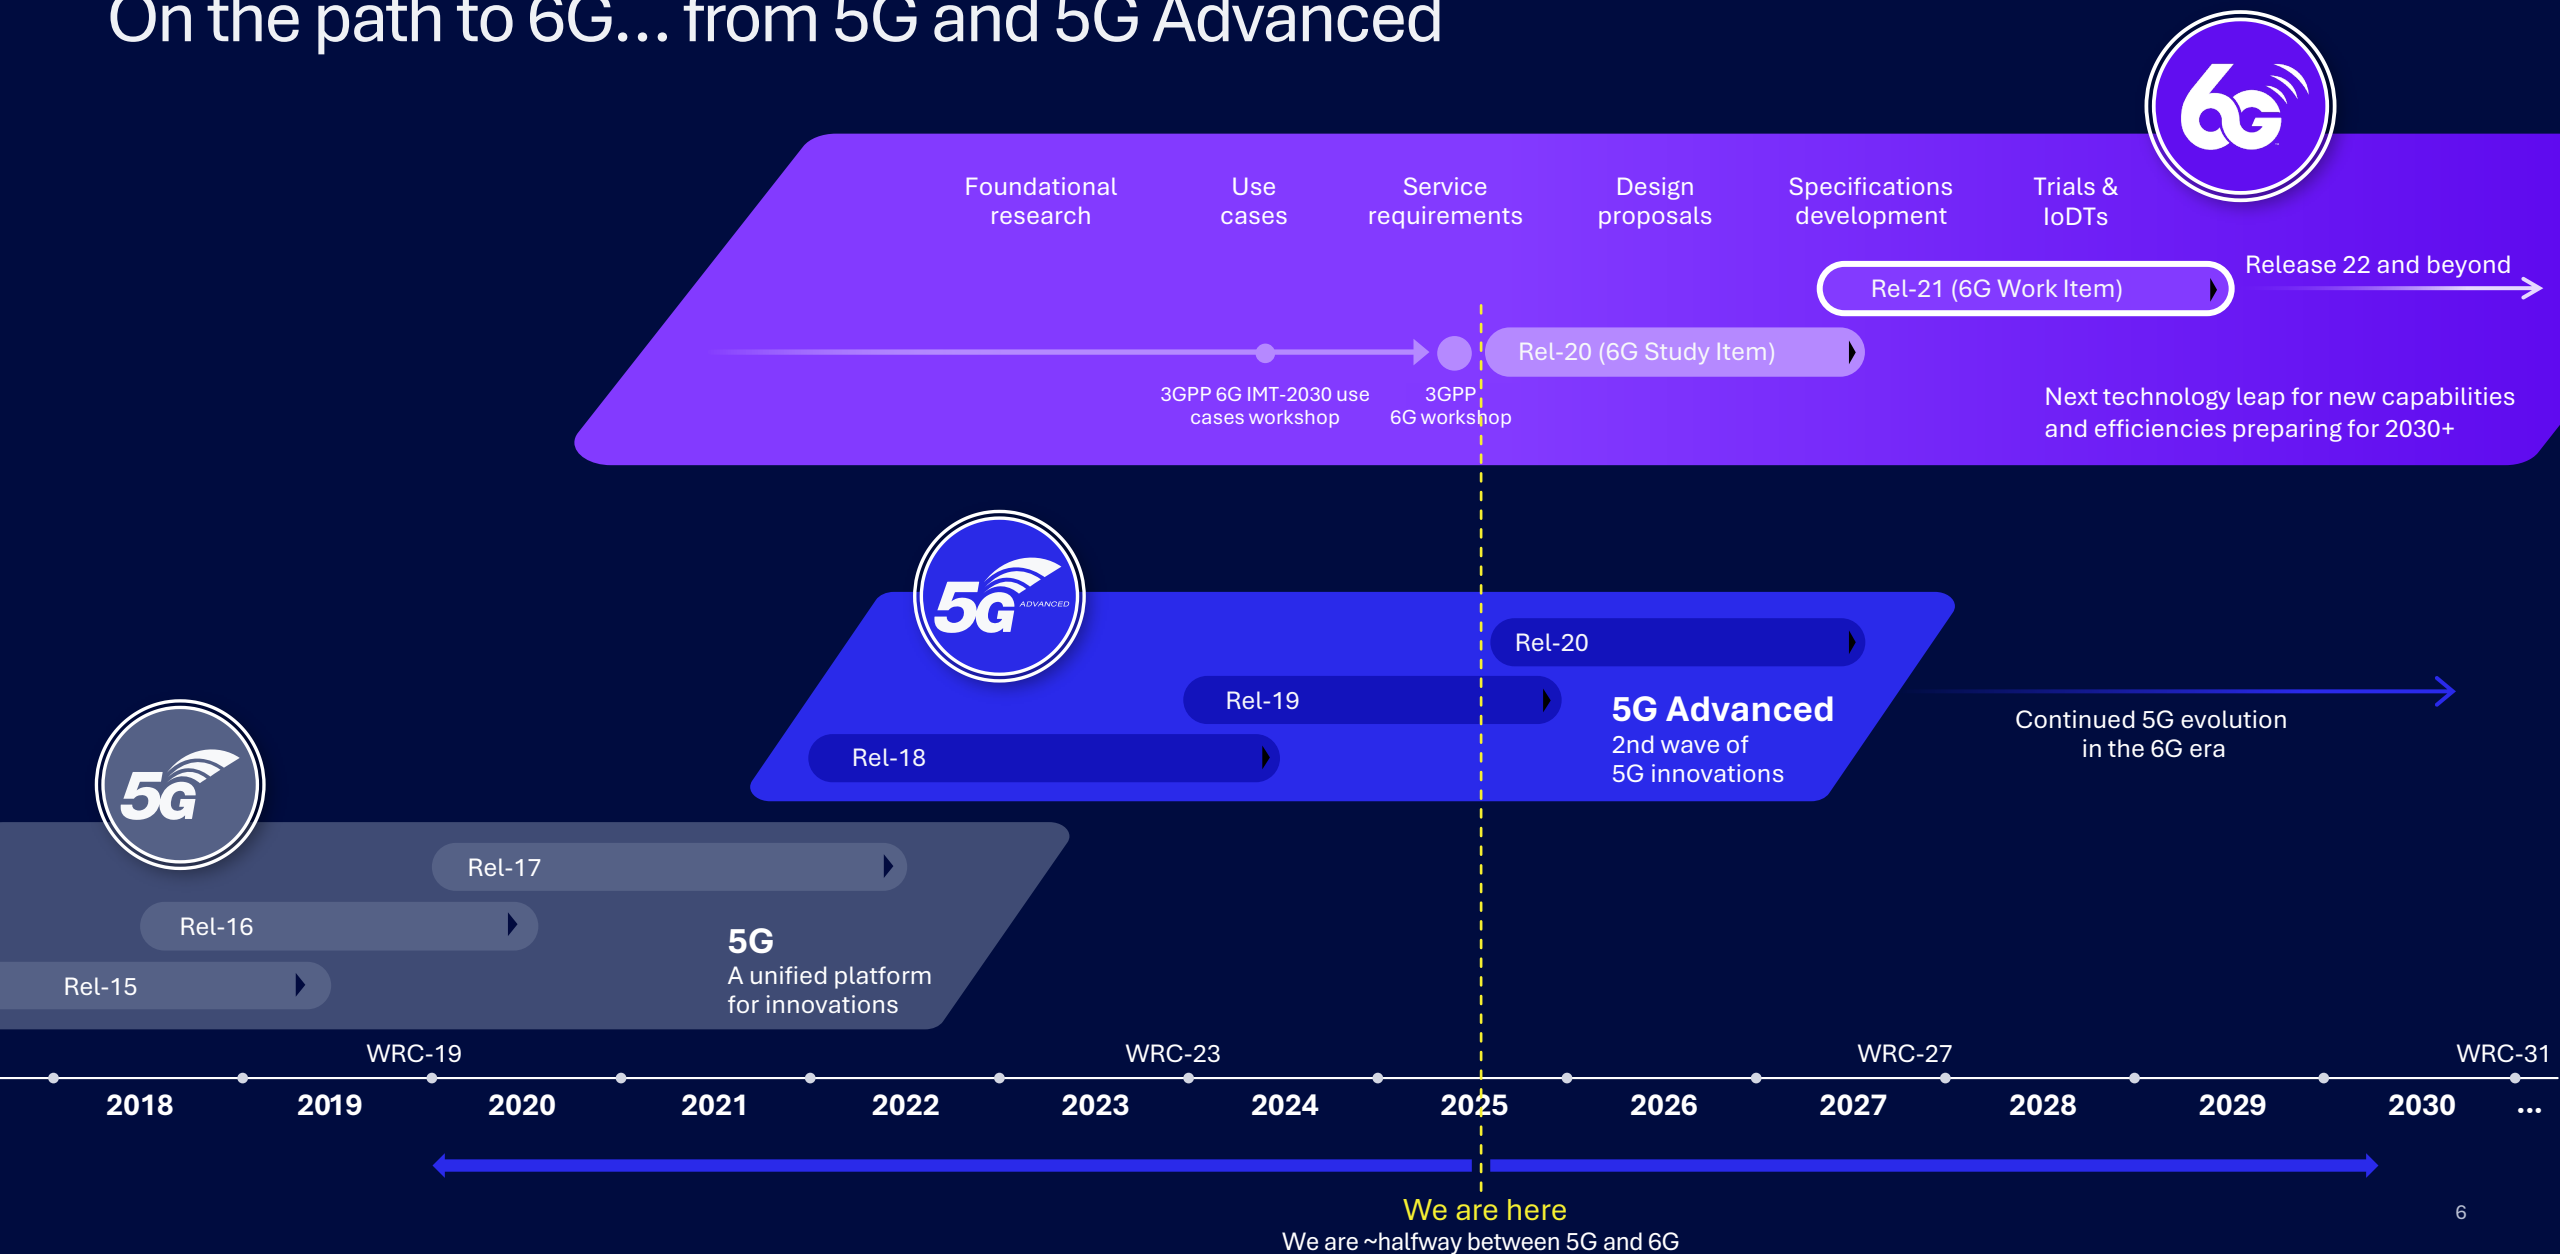

3GPP Release 20 to begin now and expected to complete by June 2027*

A closer look at the Release 20 timeline

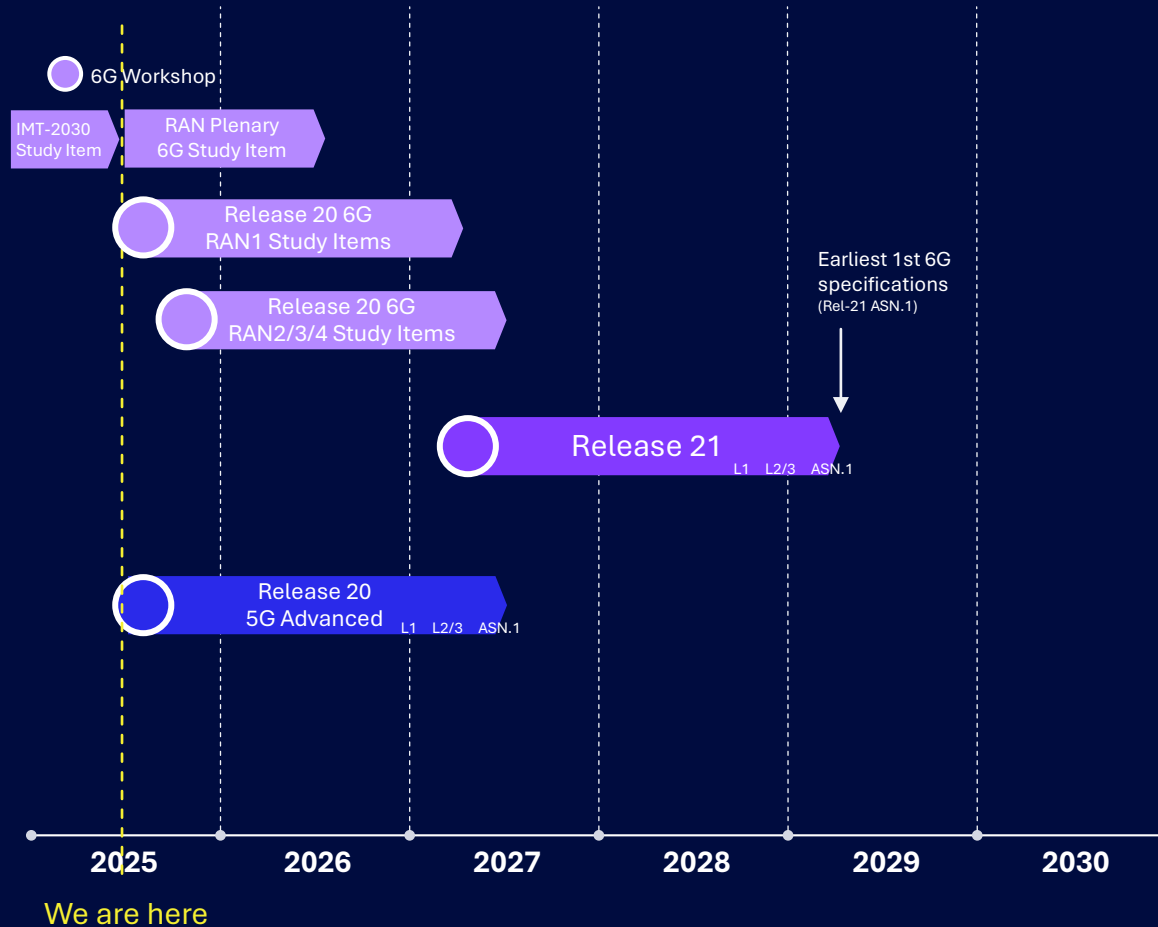

* Now = June 2025, ASN.1 milestone expected in June 2027



Laying the foundation for next-generation wireless system

- First release with 6G Study Items
- Focusing on the foundational aspects of the wireless system
- Sufficient time to be allocated to 6G study



Completing the 5G Advanced evolution for its full potential

- Last release with 5G-only projects (6th release of 5G, 3rd release of 5G Advanced)
- Reasonable time to be allocated for 5G Advanced
- No approval of any 5G Advanced Study Items targeting the entire release duration
- Must consider commercial uptake of previous releases and focus on critical needs only

“...an overall principle in 3GPP to create
lean and streamlined standards for 6G, e.g.,
by dimensioning an appropriate set of functionalities,
minimizing the adoption of multiple options for the same
functionality, avoiding excessive configurations, etc.
Any exception to the above shall be well justified.”

Endorsed by:

Apple, AT&T, BT, CMCC, DT, Ericsson, Huawei, Intel, KT, MediaTek, Nokia, NTT Docomo,
Qualcomm, Reliance Jio, Samsung, Spark NZ, T-Mobile USA, Telstra, Verizon, Vodafone, ZTE

6G RAN Plenary Study

Initially approved in December 2024, revised in March and June 2025

Investigate a candidate set of minimum technical performance requirements (TPRs) based on the Recommendation ITU-R M.2160, as well as the associated target values and key assumptions for the identified minimum TPRs

Identify typical and practical deployment scenarios defined by attributes e.g., carrier frequency, inter-site distance, user density, maximum mobility speed, and others

Develop 3GPP requirements for 6G Radio for improvement of existing and new services

Determine the applicability of legacy services to 6G Radio, and define radio requirements

Develop 3GPP requirements for 6G Radio for these practical deployment scenarios to ensure substantial gains in all relevant bands (e.g., overall performance, user experience, TCO reduction) for:

- Ensure appropriate set of functionalities, minimize the adoption of multiple options for the same functionality, avoid excessive configurations, excessive device capabilities and device capabilities reporting
- Energy efficiency and energy saving for network and device
- Enhanced spectral efficiency
- Enhanced overall coverage, focus on cell-edge performance and uplink coverage
- Wider channel BW (at least 200MHz) support for 6G deployments at least > 2 GHz, around 7 GHz
- Re-use of existing 5G mid-band (~3.5GHz) site grid for 6G deployments in at least around 7 GHz and targeting comparable coverage to 5G mid-band
- Target scalable and forward compatible design for diverse device types
- Improved spectrum utilization and operations taking into account diverse spectrum allocations
- Aim at using common 6G Radio design, which meets mobile broadband service requirements as high priority, to also meet vertical needs
- Aim at a harmonized 6G Radio design for TN and NTN, including their integration
- System simplification, including reducing configuration complexity, enabling more efficient Cell/device management, etc.

Define a time plan & steer work as appropriate for the RAN WGs during the 6G WG SI to deliver high-level decisions for:

- Fundamental 6G radio design aspects: waveform, numerology, channel coding, etc.
- Overall high-level aspects of 5G to 6G migration
- RAN architecture and interfaces, including RAN-Core interface
- Coordination of 6G AI/ML framework



3GPP RELEASE 20

5G Advanced Projects

Evolving 5G to its fullest potential –
new and enhanced system capabilities
building on the strong 5G foundation



Our advanced innovations lead the path to 6G

FOUNDATIONAL QUALCOMM INNOVATIONS LEAD ALL 3GPP RELEASES

Enhancing mobile broadband



Smartphones and laptops



Fixed Wireless and enterprise



Boundless extended reality



IoT expansion

Enabling new verticals



Automotive



Industrial IoT

6G

5G Advanced
Release 19/20

5G Advanced
Release 18



IoT Advancement and Expansion

Release 16

Advanced power saving & mobility
Mission-critical design
Precise positioning
Sidelink
Unlicensed spectrum
New deployment models

Release 15

Flexible slot-based framework
Scalable numerology
Advanced channel coding
Massive MIMO
Mobile mmWave

Release 17

Reduced capability devices (RedCap)
Non-terrestrial networks (NTN)
Device enhancements
Topology expansion
mmWave expansion


4G

Foundations

Broadband Evolution



Enhanced Uplink



Efficient System Design




Wireless AI Foundation



3GPP RELEASE 20

Continued 5G Advanced technology evolution


Further evolving 5G system foundation



MIMO
evolution




Device mobility
improvement



Satellite communication
enhancement



Coverage
extension



AI-enhanced
air interface



SON / MDT and
other enhancement

Exploring new devices and use cases



Ambient
IoT



Integrating sensing
and communication



Extended reality (XR)
optimization

Advancing 5G MIMO design for extended coverage and capacity

Release 20 scope

UPLINK CAPACITY AND COVERAGE ENHANCEMENTS

Multiple frequency-domain starting positions for SRS¹ repetition symbols within each SRS frequency hop for RB²-level partial frequency sounding

Cross-slot SRS between one “U” slot and one adjacent “S” slot within a single SRS resource set

DOWNLINK CSI³ ACQUISITION (FR1) ENHANCEMENTS

Early SRS / CSI / CSI-RS⁴ triggering for devices transitioning from IDLE / INACTIVE to CONNECTED mode, and SCell⁵ activation in CONNECTED mode

For 48, 64, and 128 CSI-RS ports aggregated over multiple CSI-RS resources per legacy specification, support CSI-RS density of 1/3, 1/4, 1/6, and 1/8 RE⁶ / RB / port while fully reusing legacy mapping

Source: RP-25156 (NR MIMO Phase 6)

1 Sounding Reference Signal; 2 Resource Block; 3 Channel State Information; 4 Reference Signal; 5 Secondary Cell; 6 Resource Element




Continued mobility enhancement

Specify improvements for lower-layer triggered mobility (LTM) Scell¹ activation to further reduce cell switching delays

Specify configuration and procedure changes to improve dynamic L1 measurement and reporting

Driving towards seamless device mobility

Release 20 Scope

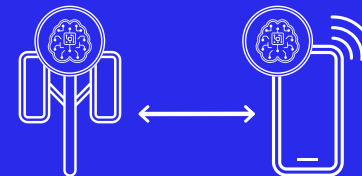

Wireless AI-enabled mobility

Specify support for RRM² measurement prediction, in time & frequency domain, for device and network-side models

Specify support for measurement event prediction for device-side models

Specify signaling & protocol to enable LCM³ functionality management for device-side (RRM management prediction & measurement event prediction) and network-side models (RRM measurement prediction), based on the Release 19 AI/ML framework

Expanding network coverage enhancements

Release 20 Scope

Support multiple PRACH¹ transmissions with different Tx beams for 4-step RACH² procedure, with device receiving uplink beam information to assist with beam selection

Specify enhancements to support PUSCH³ repetition scheduled by DCI⁴ 0_0 with C-RNTI⁵

Enhance to improve PUSCH coverage for higher uplink data rate by extending pi/2-BPSK⁶ to more MCS⁷ entries in MCS tables



Source: RP-251862 (Coverage enhancements for NR Phase 3)

1 Physical Random Access Channel; 2 Random Access Channel; 3 Physical Uplink Shared Channel; 4 Downlink Control Information; 5 Cell Radio Network Temporary Identifier; 6 Binary Phase-Shift Keying; 7 Modulation and Coding Scheme

Continued wireless AI evolution preparing for an AI-native air interface

Release 20 projects on AI for air interface and next-gen RAN



Wireless AI for air interface design

Define framework for two-sided AI/ML models for CSI¹ feedback enhancements

- Include signaling and protocol aspects of LCM² enabling functionality and model selection, activation, deactivation, switching, fallback, including ID related signaling
- Support model training, inference, and performance monitoring

Enhance CSI feedback, encompassing two-sided models

- Include spatial/frequency compression without temporal aspects
- Support signaling and mechanism for model pairing procedure including ID and applicability reporting, as well as inference aspects including target CSI type, measurement and report configuration, CQI³ RI⁴ determination, payload determination, quantization configuration codebook, UCI⁵ mapping, CSI processing criteria and timeline, priority rules for CSI reports

Support inter-vendor training collaboration for two-sided AI/ML models

- Include fully defined/specified reference model considering scalability study outcome
- Specify standardized encoder model structure plus parameter exchange, leveraging defined/reference model and considering scalability study outcome
- Specify standardized dataset format/content plus dataset exchange

Support standards-based device data collection for device-side model training

Define interoperability and RRM⁶ requirement for the encoder



Wireless AI for next-generation RAN

Study AI/ML-based mobility use case based on the principles of AI/ML for next-generation RAN with existing interfaces and architecture, including the following scenarios:

- Multi-hop device trajectory across gNodeBs
- Intra-CU⁷ LTM⁸
- Handover enhancements, e.g., inter-CU LTM

Source: RP-251870 (AI/ML for NR air interface enhancements), RP-251868 (Study on AI/ML for NG-RAN Phase 3)

1 Channel State Information; 2 Lifecycle Management; 3 Channel Quality Indicator; 4 Rank Indicator; 5 Uplink Control Information; 6 Radio Resource Management; 7 Central Unit; 8 Low-layer Triggered Mobility

Further enhancing 5G system design for non-terrestrial networking (NTN)

3GPP Release 20 scope



5G NTN for broadband connectivity (NR-NTN)

Study enhancements to enable GNSS¹ resilient operation, assessing impact on initial access and connected mode procedures for NR-NTN, where GNSS information in device may be temporarily unavailable, available but with GNSS position accuracy degradation, or available but with increased GNSS measurement period for power saving purpose

Aiming to minimize physical layer procedure impact, avoid physical layer channel/signal changes, and prevent backward compatibility issue with legacy NTN devices

Specify enhancements and necessary RRM requirements to support 3G (E-UTRA²) to 5G NR NTN handover in RRC³ connected mode



5G NTN for IoT connectivity (IoT-NTN)

Study to support voice over narrowband (NB) IoT-NTN via GEO⁴ satellites

- Down-selecting between control and user plane-based approach
- Supporting semi-persistent scheduling for UL/DL voice
- Supporting necessary modifications to RRC connection setup procedure and for emergency call
- Study and if feasible, specify device transmit power higher than PC1 (e.g., up to 37dBm)

Source: RP-251863 (Study on GNSS resilient NR-NTN operation), RP-251867 (NTN for IoT Phase 4); RP-251878 (E-UTRA TN to NR NTN handover enhancements)

1 Global Navigation Satellite System; 2 Evolved Universal Terrestrial Radio Access; 3 Radio Resource Control; 4 Geostationary

Evolving ambient IoT to support broader use cases



Release 20 projects specify support for:

Device 1 ($\sim 1\mu\text{W}$ peak power with energy storage, backscattered uplink on a carrier wave provided externally)

Device 2b¹ (≤ 100 's μW peak power with energy storage, uplink generated internally by the device)

Device C¹ ($\leq 1\text{mW}$ to $\leq 10\text{mW}$ peak power with energy storage, uplink generated internally by the device)



Work Item to enhance active devices for indoor deployments

1. Specify support for D1² deployment scenario with T1³ topology, with DO-DTT⁴, DT⁵, DO-A⁶ traffic, addressing indoor inventory (rUC1), indoor sensor (rUC2), and indoor command (rUC4) use cases, assuming readers are deployed on the same site as existing 5G NR base stations in FR1 FDD spectrum
2. Specify support for D2⁷ deployment scenario with T2⁸ topology, for both passive (Device 1) and active (Device 2b/C) devices, addressing rUC1 and rUC4 use cases, in FR1 FDD spectrum
3. Specify active device (un)availability via Direction 2, where the reader can provide information to a device based on which the device may become available/unavailable



Study Item to support active devices for outdoor deployments

1. Specify necessary and feasible changes to support D4⁹ deployment scenarios with T1 topology, with DO-DTT, DT, DO-A traffic, addressing outdoor inventory (rUC5) outdoor sensor (rUC6) and outdoor command (rUC8) use cases, assuming readers are deployed on the same site as existing outdoor 5G NR base stations in FR1 FDD spectrum, with study assuming:
 - Maximum distance between reader & device: 50-500m
 - Maximum Tx power: -20dBm to -10 dBm (Device 2b), -3dBm to 5dBm (Device C)
2. Decide whether to support additional features, such as positioning and proximity detection

Source: RP-251884 (Enhancements for solutions for Ambient IoT in NR outdoor for active devices), RP-251885 (Solutions for Ambient IoT in NR Phase 2)

1: New Release 20 device classes with better Sampling Frequency Offset (SFO) than any Release 19 Device 1; 2 Deployment scenario 1 with indoor IoT device and base station; 3 Topology 1 with base station and IoT device communication; 4 Device-originated device-terminated-triggered traffic, where the Ambient IoT device initiates communication in response to a previous inbound message or trigger from the network; 5 Device-terminated traffic; 6 Device-originated-autonomous traffic; 7 Deployment scenario 2 with indoor IoT device and outdoor base station; 8 Topology 2 with base station IoT device communicating via an intermediate node; 9 Deployment scenario 4 with outdoor IoT device and base station

Enhancing 5G system for better extended reality (XR) user experience

Release 20 scope

Study the transmission characteristics of mobile AI traffic and specify potential enhancements (e.g., mobile AI awareness, PDU¹ set for mobile AI data) for uplink traffic, considering transmission characteristics of uplink mobile AI traffic

Specify coordination between gNodeB and core network to enable / disable N3 interface delay measurement from core network to gNodeB, for better latency guarantee




Studying integrated sensing and communication (ISAC) for drone use cases

Release 20 scope

Evaluate the performance of monostatic gNodeB sensing for drones, utilizing 5G NR waveform and reference signal, and to identify metrics, measurements, and relevant measurement quantization, as well as deployment scenario and assumptions for channel model calibration

Study procedures and signaling between radio access network (RAN) and core network (CN)


Study network architecture of monostatic gNodeB sensing, including applicability for bistatic mode using this network architecture without additional impact

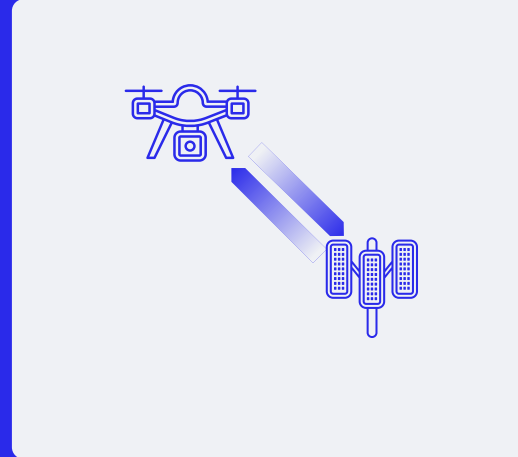

Monostatic

NETWORK-ONLY

Sensing transmitter and receiver are co-located in the same entity

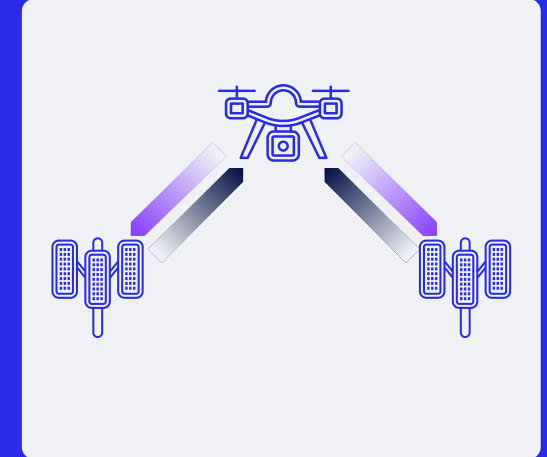

Bistatic

NETWORK-ONLY

Sensing transmitter and receiver are located in different entities

Other system enhancements to 5G Advanced



Data collection for SON¹ / MDT²

Enhance MRO³ for Release 19 mobility mechanisms, including inter-CU⁴ LTM⁵, and intra-CU conditional LTM, specifying inter-node information exchange, including possible enhancements on the existing interfaces and necessary device reporting to enhance the mobility parameter tuning



5G drone communications

Specify drone-specific IDLE / INACTIVE mode mobility, including mechanism prioritizing frequencies/cells for cell reselection and altitude-based SSB⁶ for device measurements

Specify height-based conditional handover trigger events for drone services

3GPP RELEASE 20


6G Projects

First set of Study Items for 6G,
establishing the wireless platform
foundation and potential
“Day-1” features



Next-generation wireless and intelligent computing are the backbone of society

Fueling economic growth, enabling new opportunities,
and bridging the digital divide

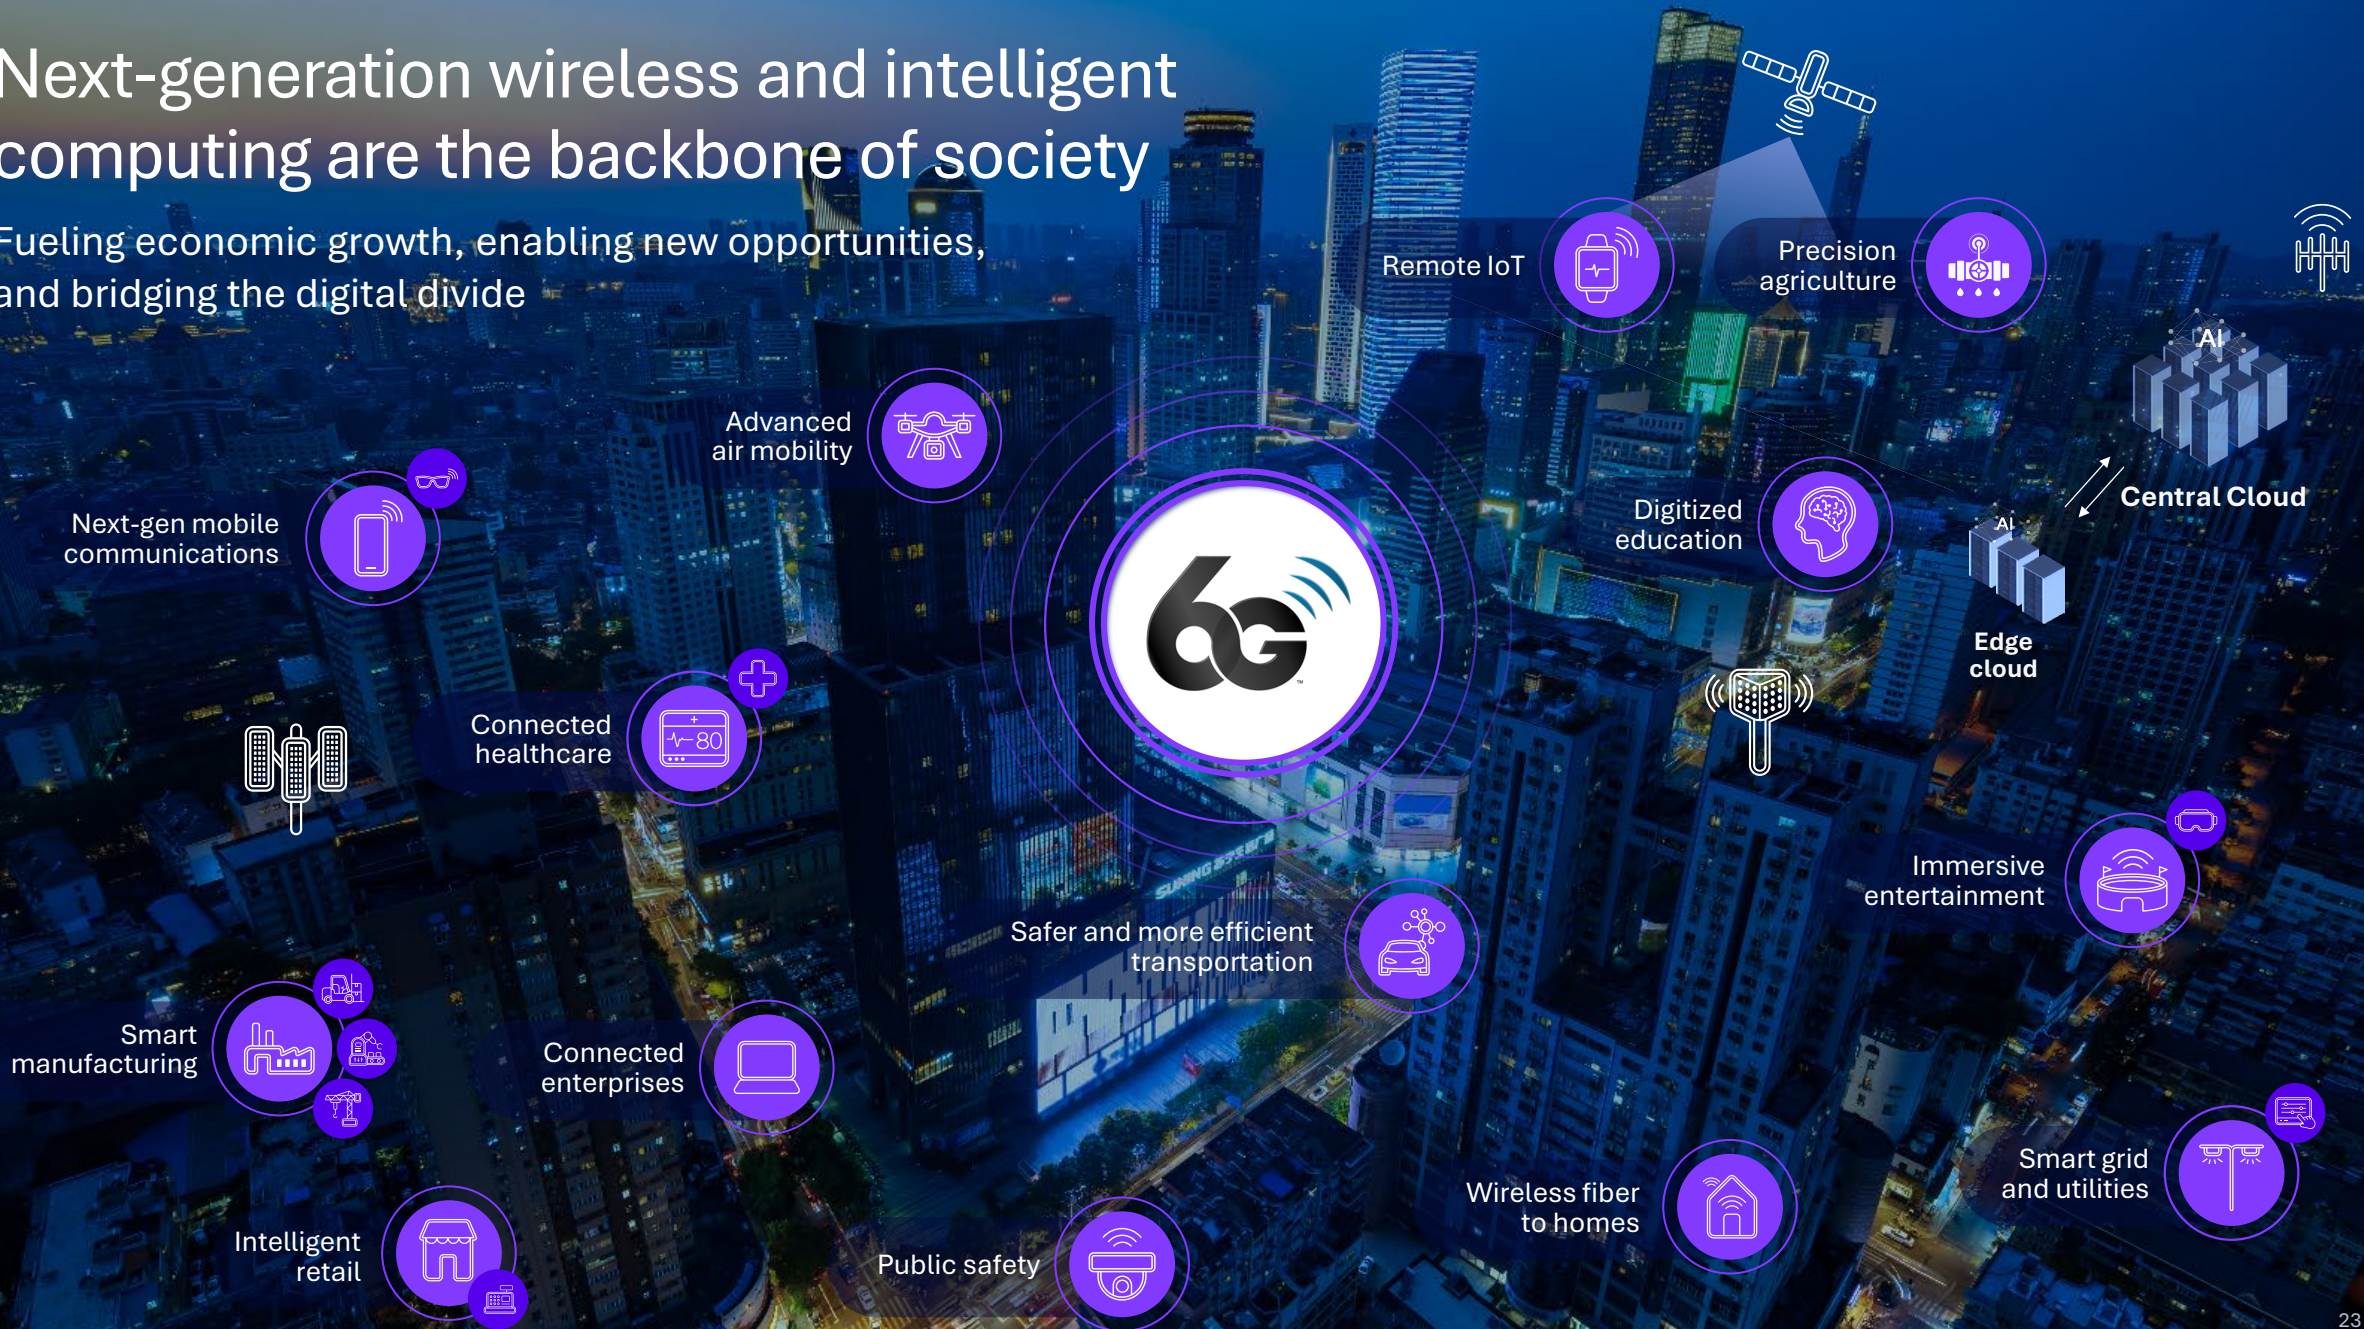

6G Radio (6GR) Study Objectives

1

Develop a non-backward compatible radio access technology to meet a broad range of use cases

2

Strive at dimensioning an appropriate set of functionalities, minimizing the adoption of multiple options for the same functionality, focusing on practical user experience

3

Identify principles to ensure extensibility and deliver superior performance


4

Address frequency ranges up to 52.6GHz, including FR1 (up to 7.125GHz), FR2-1 (24.25–52.6GHz), and FR3 (7.125–25.25 GHz)




3GPP RELEASE 20


Study Item scope for 6G Radio

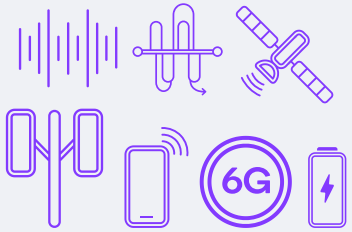

Technology Framework

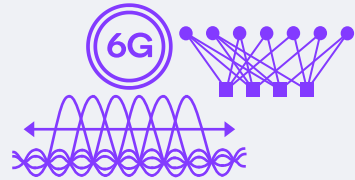


Physical Layer Structure




Radio Interface Protocol Architecture and Procedures




Mobility



Core and Performance Requirements




Base Station and Device RF

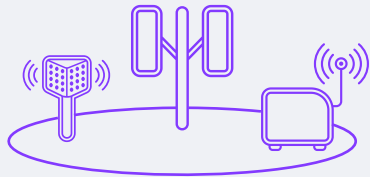

RAN Architecture, Interface Protocols and Procedures



5G/6G Migration, Interworking, Mobility



Wireless AI



RF Sensing


Establishing a unified technology framework leveraging past generation learnings



6GR standalone (SA) architecture
supporting existing & new services, meeting diverse usage scenarios, requirements, deployments and design principles

Simplified system design
with reduced configurations, device capabilities and more efficiency management

Satellite Coverage
Harmonized 6G radio design that integrates terrestrial and non-terrestrial (NTN) networks

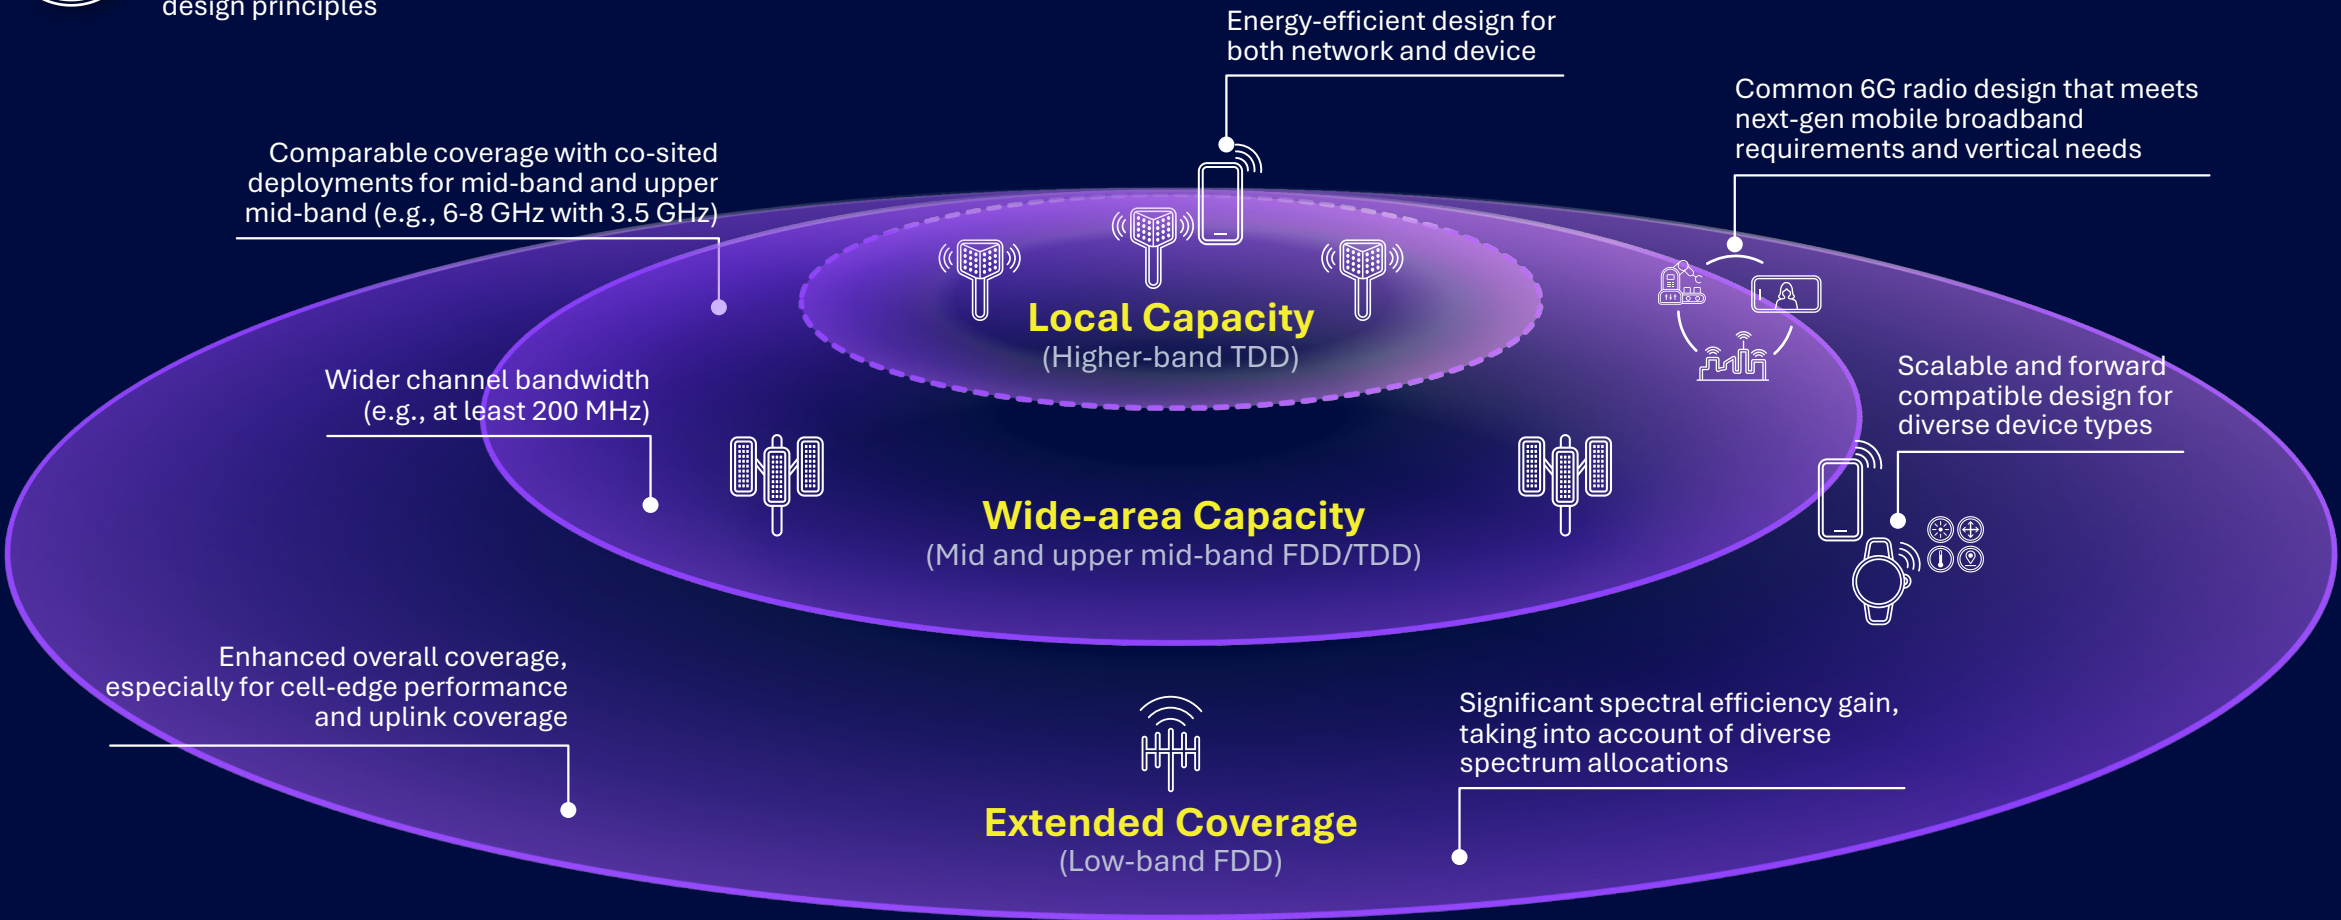

A new 6GR foundational physical layer structure

Enhanced 6GR OFDM¹-based waveforms and modulations, building on 5G NR design

Unified frame structure with 5G NR compatibility to allow for efficient 5G-6G multi-RAT Spectrum Sharing (MRSS)

Evolved channel coding design based on LDPC² and Polar code to satisfy new requirements with acceptable trade-offs

Numerology to support wider channel bandwidth

Physical layer control, data scheduling and HARQ³ operation

MIMO operation including support for Giga-MIMO

Duplexing improvements e.g., SBFD⁴

Efficiency initial access design (e.g., synchronization signal and raster, broadcast signals / channel, physical random-access channel, system information and paging)


6GR spectrum utilization and aggregation

Other physical layer signals, channels and procedures

Also evaluating performance of at least energy efficiency, spectrum efficiency, and coverage vs. 5G NR



Studying to define a new 6G air interface design



Radio interface protocol architecture and procedures


User plane architecture and protocol design

Control Plane architecture, e.g., RRC¹ states, and protocol design

Access stratum security aspects

Signaling framework for device capabilities, aiming at improvements and simplification vs. 5G NR

Data transfer design to support various type of data

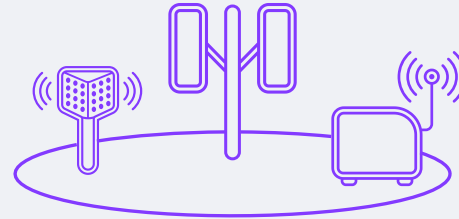

RAN² architecture, interface protocols and procedures

Overall RAN architecture aspects

RAN-CN³ functional split, interface, protocol stack and procedures

RAN internal functional split, interfaces, protocol stacks and procedures



Mobility management

Mobility for all RRC⁴ states, including related RRM⁵

Preparing for a new end-to-end 6G RF design

General scope

Study intra-3GPP co-existence

Study RF-related system parameters and requirements, including, channel raster, synchronization raster, etc.



Base station RF requirements

Improve and/or simplify vs. 5G NR base station RF requirements and testing framework, including multi-standard radio (MSR) and active antenna system (AAS) operation

Improve base station core, conformance specifications, including structure and drafting principles


Device RF requirements

Improve and/or simplify vs. 5G NR device RF requirement framework

Improve 6G device RF specifications, including structure, drafting principles, and database for band combinations

Study device RF capabilities considering different device types and implementations

6G core and performance requirements



Radio resource management (RRM)

RRM requirement and procedure aspects aiming at improvements and/or simplifications vs. 5G NR


Study how to improve 6G requirement specification, including structure and drafting principles



Demodulations and performance

Demodulation and performance requirement framework and key assumptions, aiming at improvements and/or simplification vs. 5G NR for device and base station

Study how to improve 6G demodulation and performance specifications, including structure and drafting principles for device and base station



Testability

Study methodology framework and key assumptions, aiming to ensure that requirements can be properly tested considering the applicability and feasibility of conductive and/or over-the-air testing with reasonable complexity



Other aspects

Handling irregular channel bandwidths including the definition

Definition of frequency ranges

5G NR to 6GR migration, interworking, and mobility




Scope of study

5G to 6G multi-RAT spectrum sharing (MRSS) for migration


Study if any additional aggregation mechanism is necessary

Mobility between 5G NR and 6GR

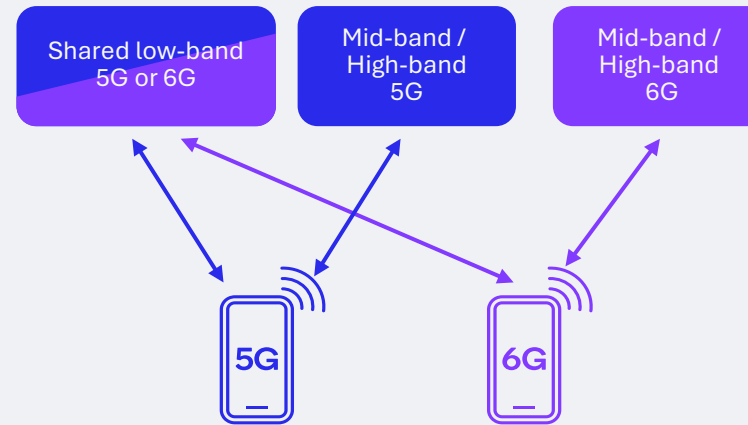

5G/6G Multi-RAT spectrum sharing (MRSS)

6G carriers can be deployed in 5G frequencies using CP-OFDMA-compatible waveforms

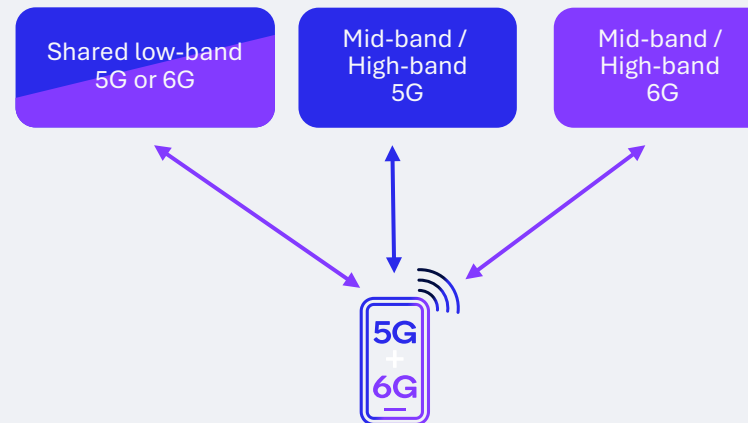

Dual-Connectivity

Device operates concurrently on 5G and 6G with aggregation supported in the RAN

OR

Dual-Stack

Device operates concurrently on 5G and 6G with aggregation supported in the Core

Building on the 5G Advanced wireless AI foundation for 6G

Study focus 1

Identify existing and new interesting use cases with compelling trade-offs (e.g., performance & complexity), and ensure coordinated discussions across working groups for related design areas (e.g., MIMO, mobility)

Study focus 2

Design an extensible AI/ML framework for identified use cases, including lifecycle management (LCM) procedures, as well as data collection and data management

6GR and RAN design shall ensure that the 6G system can also operate without AI/ML



Enabling integrated sensing and communication (ISAC) in 6GR

Study physical layer (PHY) functions and procedures for sensing technology (e.g., waveforms, reference signals, measurement feedback)

Evaluate sensing performance and if necessary, extend channel modelling, for the selected use cases

Study aspects of integration with communication services


Evaluate higher layer procedures, and protocols

Study RF, coexistence, and testability



SENSING-ASSISTED COMMUNICATIONS

Sensing can tangibly improve wireless communications performance (e.g., latency, power consumption)

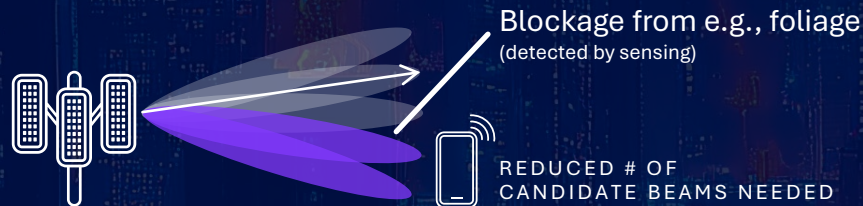

COMMUNICATIONS-ASSISTED SENSING

Wireless communications can efficiently scale sensor footprint and enable new use cases



Study on 6G system architecture

Working towards a lean and streamlined standards for 6G



Overall 6G access architecture

Study the support for control signaling, focusing on identifying new and a minimal set of NAS¹ functionalities without affecting existing ones, as well as developing generic mechanisms for device to core network interaction to support operator services

Study the support and enhancement of different non-3GPP access (e.g., Wi-Fi, wireline) in 6G, and multi-access data connections between 3GPP and non-3GPP access

Study the support and enhancement of essential/regulatory services (i.e., voice, messaging, location services, emergency services, MPS², mission-critical services, PWS³) in 6G

Identify other 5G features that will be supported in 6G



Migration and interworking

Study the support for 6G migration, 5G interworking, interworking between 6G and 4G/5G NTN/satellite access that use EPS⁴/5GS, and whether to support interworking with 4G EPS




Wireless AI

Study how to support and enable use of AI in 6G (e.g., AI agent, framework)



Integrated sensing

Study the integration of sensing and communication over 3GPP access, considering the sensing modes to be supported and other sources of sensing data



Data framework

Study all aspects related to efficient and scalable data handling (e.g., data collection, distribution, processing, storage, data access and data exposure), with consideration of access control/user consent and privacy where relevant



Distributed compute

Study aspects on support of computing for device, core network and application server in 6G (e.g., coordination between device, core network and application server, exposure of computing service in the core network, etc.)



Non-terrestrial networking (NTN)


Study how to support 6G RAT for NTN, based on RAN decision, and support service continuity aspects



Internet of Things (IoT)

Study whether and how to support cellular IoT enablers in 6G, based on RAN decision for 6G IoT

Leading wireless technology innovation

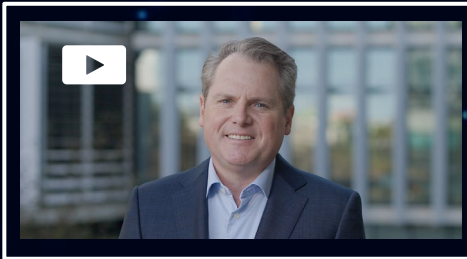

Qualcomm
Wireless Research Directions & Priorities



FOUNDATIONAL EVOLUTION

Ubiquitous Coverage	Massive Capacity
Lower-band spectrum design	New wide-area capacity with 6G Giga-MIMO
5G NTN evolution	Super-QAM in upper midband
Flexible wireless augmented data center	

OPERATIONAL OPTIMIZATION

Real-time Efficiency	Adaptive Intelligence
Network slicing with digital twins and gen AI	AI-native wireless system design
Digital twin-assisted hybrid beamforming	Wireless AI model lifecycle management
AI-enhanced wireless efficiency	
Wireless AI performance verification	

EMERGING SERVICES

Augmented perception	Immersive communication
Sensing-enhanced communications	Immersive experiences with distributed spatial computing
Wireless sensing for aerial drone detection	

Thank you

Nothing in these materials is an offer to sell any of the components or devices referenced herein.

© Qualcomm Technologies, Inc. and/or its affiliated companies. All Rights Reserved.

Qualcomm and Snapdragon are trademarks or registered trademarks of Qualcomm Incorporated.
Other products and brand names may be trademarks or registered trademarks of their respective owners.

References in this presentation to “Qualcomm” may mean Qualcomm Incorporated, Qualcomm Technologies, Inc., and/or other subsidiaries or business units within the Qualcomm corporate structure, as applicable. Qualcomm Incorporated includes our licensing business, QTL, and the vast majority of our patent portfolio. Qualcomm Technologies, Inc., a subsidiary of Qualcomm Incorporated, operates, along with its subsidiaries, substantially all of our engineering, research and development functions, and substantially all of our products and services businesses, including our QCT semiconductor business.

Snapdragon and Qualcomm branded products are products of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm patents are licensed by Qualcomm Incorporated.

Follow us on: [in](#) [X](#) [@](#) [v](#) [f](#)

For more information, visit us at [qualcomm.com](https://www.qualcomm.com) & [qualcomm.com/blog](https://www.qualcomm.com/blog)

